


Thermo Pro water heaters for the Marine market

Thermo Pro 90 / Thermo Pro 90 Chiller

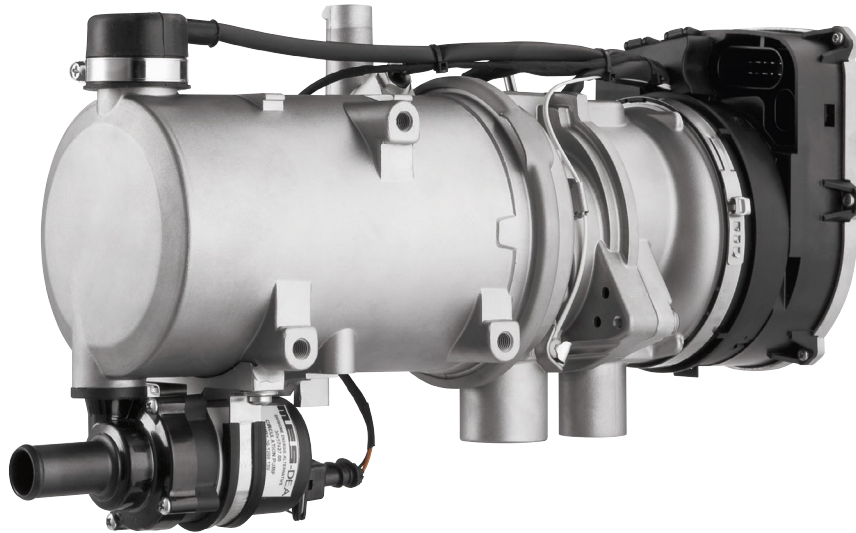

Comfort as you know it at home. Webasto water heaters not only ensure even heat distribution in the boat, but also provide domestic hot water in connection with a water boiler. These heaters can be installed in the engine room with minimum space requirements, and can be easily combined with Webasto chiller air-conditioners to form an integrated climate control system.

Thermo Pro 90 Marine – state-of-the art controller and easy service:

This device is ideal for daily use: infinitely variable power adjustment, high heat output, compact dimensions, service-friendly technology and an extremely low noise level.

Thermo Pro 90 Chiller – the heater for integration into an A/C system:


If you want to build a BlueComfort system with a Thermo 90 heater, use the Thermo Pro 90 Chiller version. It comes with a special electronic control unit and without the water pump which is not needed.

Advantages at a glance:

- Ideal for daily use
- Infinitely variable power adjustment
- High heat output
- Compact dimensions
- Service friendly technology
- Extremely low noise level
- Fulfills Marine heater norm EN ISO 14895



Marine

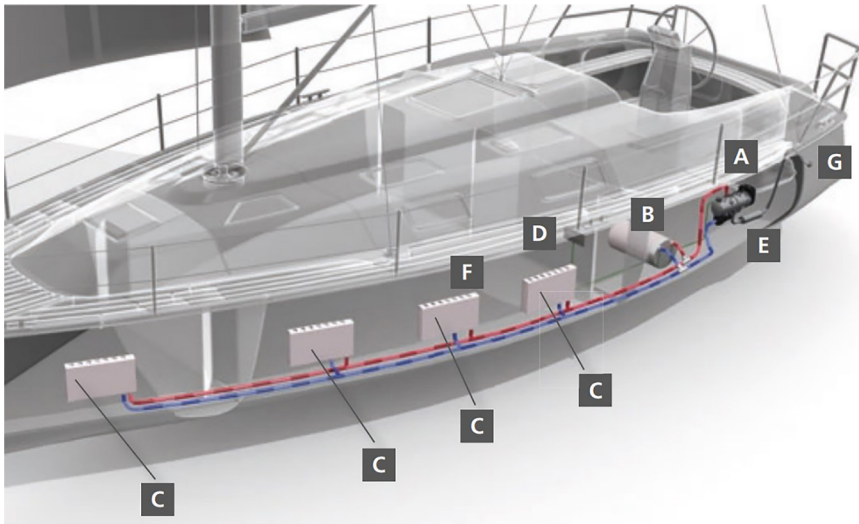

- A** Space-saving and inconspicuous installation in the engine room
- B** Boiler for heating hot water – for extra comfort
- C** One radiator for each cabin allows an individual temperature control
- D** Controls – simple and logical to use
- E** Circulating pump
- F** Fresh water tank
- G** Stainless steel exhaust

Technical specifications

	Thermo Pro 90
Heating power (kW) Heating power (BTU / h)	1.8 – 7.6 kW; boost mode 9.1 6,100 – 26,000 BTU / h; boost mode 31,000
Fuel, Fuel consumption, partial/full load/boost (l / h) Fuel, Fuel consumption, partial/full load/boost (gal / h)	Diesel 0.18 – 1.08/1.3 Diesel 0.05 – 0.24/0.34
Rated voltage (V)	12, 24
Rated power consumption (W) Flow rate of circulating pump (against 0.3 bar) (gal / min.)	20 – 83 (90 Boost), 3.0 – 6.9 amps (7.5 Boost) at 12 V, 1.5 – 3.5 amps (3.8 Boost) at 24 V
Flow rate of circulating pump (against 0.3 bar) (l / h) Flow rate of circulating pump (against 0.3 bar) (gal / min.)	700 3.1
Dimensions L x W x H (mm) Dimensions L x W x H (inch)	352 x 131 x 232 13.9 x 5.2 x 9.1
Weight incl. circulation pump (kg) Weight incl. circulation pump (lbs)	5.3 11.7



MultiControl



ThermoCall App

The MultiControl sets new standards in terms of its modern design and user-friendliness that allows fast and intuitive operation. It includes features like an immediate start button, the ventilation function and fault code display. You can program up to three start times per day for your heater which allows the best individual comfort.

Even greater comfort with our innovative Webasto ThermoCall App. Run your water or air heater easily with a smartphone via App for iOS and Android device.



Contact details

webasto.com