





As part of Webasto's commitment to continuous improvement, we are proud to release the next generation Air Top diesel heater, the AT2000STC.

The AT2000STC heater release is in parallel to the introduction of the new Digital Programmable controller.



- Digital screen
- Normal Mode (comfort heating)
- 7 day Timer Setting – up to 3 timer settings per day
- In-built diagnostics
- Fault codes displayed on screen
- Simple user navigation

Main Harness

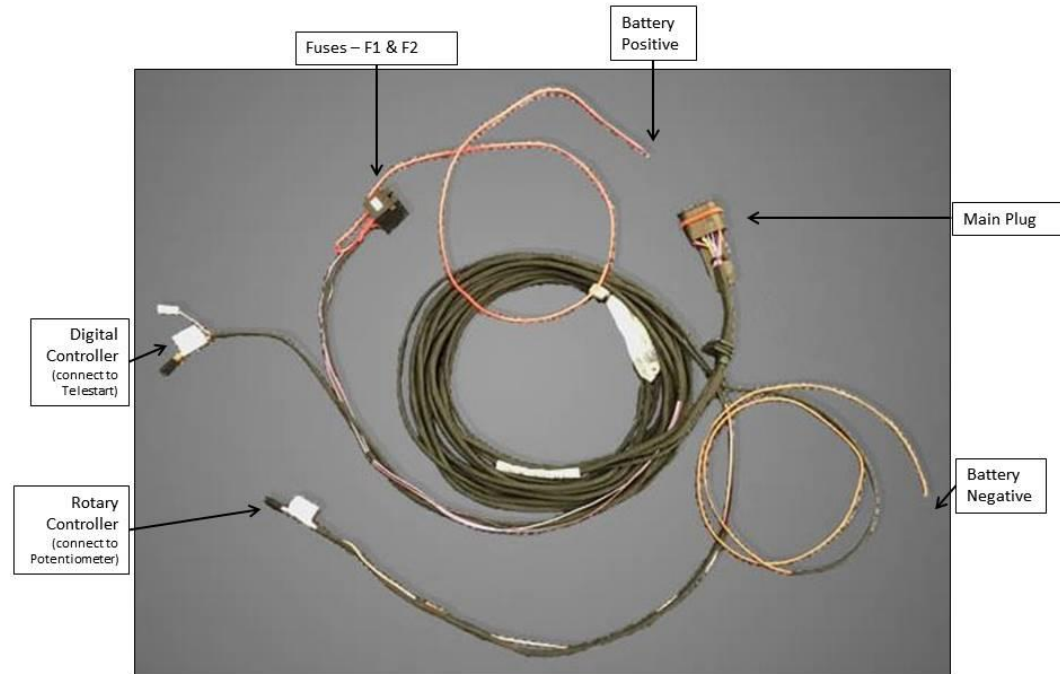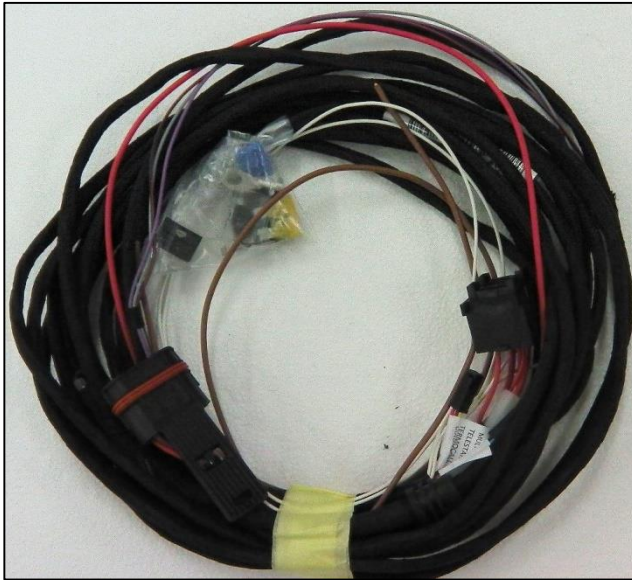

- Improved main harness compatible with both the Rotary Control and new Programmable Digital Multi Control
- The Rotary Control connection plug is labelled “Potentiometer”
- The Digital Control connection plug is labelled “Telestart”
- 12V Heater: Fuse 1 – 20 Amp for Heater; Fuse 2 - 1 Amp for Diagnostics
- 24V Heater: Fuse 1 – 15 Amp for Heater; Fuse 2 - 1 Amp for Diagnostics

Fuel Pump & Mounting Bracket



DP42 Fuel Pump



Rubber Mounting Bracket

- The new DP42 Fuel Pump provides a 10dB noise reduction, which is half the perceived noise level compared to the previous model
- New rubber mounting bracket and 90 degree fuel connector elbow optimise noise reduction

Exhaust Muffler



- Larger stainless steel muffler
- Exhaust noise on start up cycles is reduced
- Exhaust pipe diameter remains at 22mm
- Improved mounting



- Comes as standard with the new Air Top 2000 STC heater
- Noise reduction in the surroundings of the heater (3-6dB)
- Helps prevent dust ingress to the combustion air system



Thank you for your attention!

Contact

Robert McVeigh

Technical Service Department

Phone: 0285364800

Email: WTAUtechnicalservices@webasto.com.au